



# GGW

RASCHIATORI  
WIPERS

TECNOLAN

Versione standard	Standard version
Poliuretano	Polyurethane
Velocità fino a / Speed up to	
0.8 m/s	
Temperatura / Temperature	
-35°C +100°C	
Applicazioni	Applications
Cilindri idraulici semplice effetto	Single acting hydraulic cylinders





**GUARNITEC**

RASCHIATORI  
WIPERS


**GGW**

282÷284

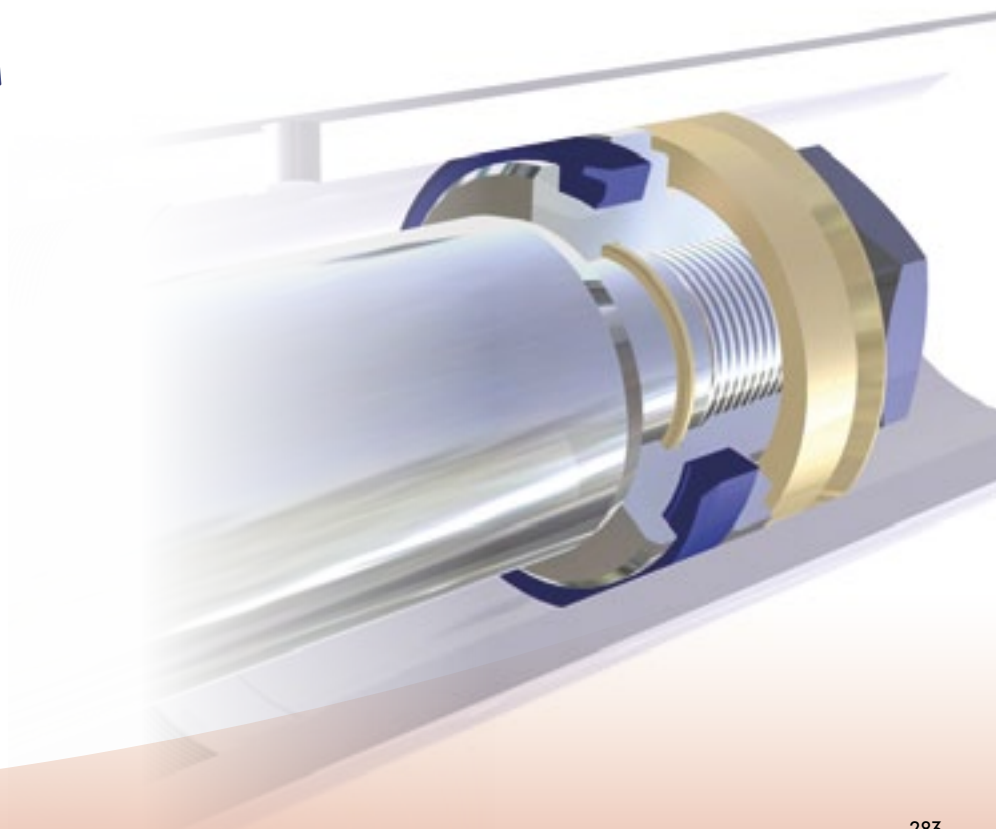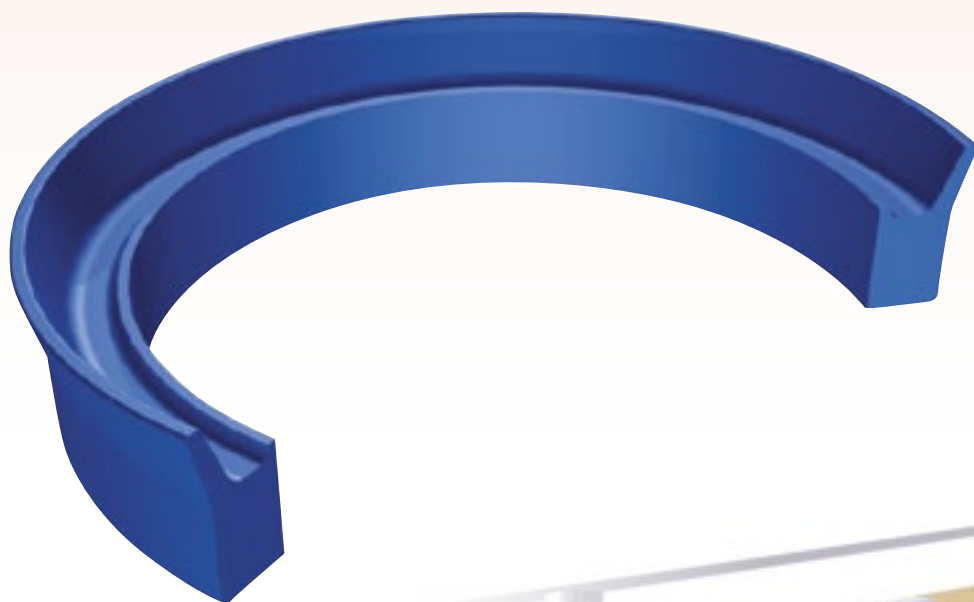



GGW

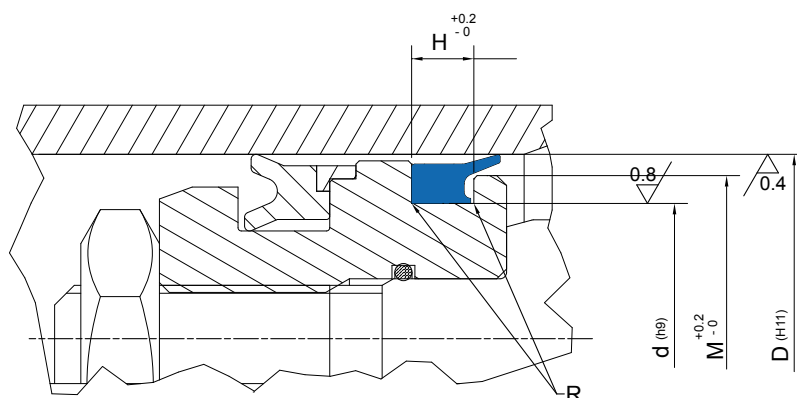

## Design wipers guidelines

<b>R</b>	$R \leq 0.5 \text{ mm}$	
<b>r</b>	$r \leq 0.3 \text{ mm}$	
<b>A</b>	<b>D<math>\leq</math> 70mm</b>	<b>D<math>\geq</math>70mm</b>
	4 mm	6 mm

[illegible]